



HIACE

VAN




Intelligent Design for Easy Driving

Intelligent design assures improved control and driving ease at all times. Essential indicators and switches are positioned for maximum visibility and intuitive operation, and the panel-mounted shift lever allows pass-through access from either side of the cabin. Ergonomic seat design contributes to a fatigue-free driving experience on long trips and in stop-and-go city traffic, keeping you refreshed, alert, and focussed on the road ahead.



Note: Please inquire at your local dealer for details on the availability of features.

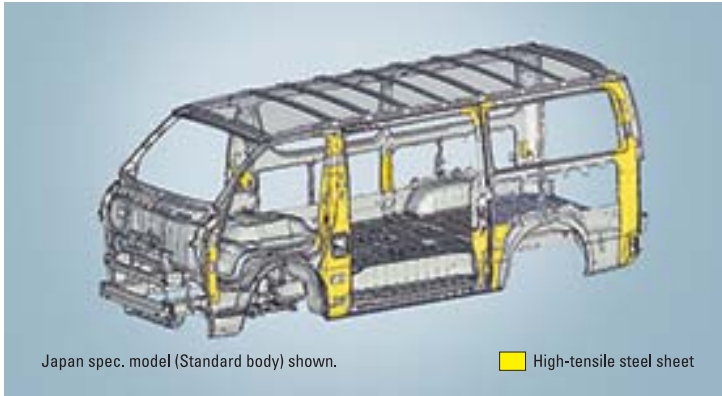

Japan spec. model (Standard body) shown.

High-tensile steel sheet



Body Rigidity

Computer analysis of the body and chassis assure designed-in durability with minimal transmission of vibration to the cabin. The result is excellent running stability and comfort for the life of the vehicle.

SRS Airbags

Driver and passenger seat SRS (Supplemental Restraint System) airbags*.
*Driver and passenger seatbelts are also equipped with pretensioners and force limiters.

Exterior Colors




White <058>



Silver Mica Metallic <1E7>



Deep Red Mica Metallic <3R9>



Light Yellow <599>




Dark Blue Mica Metallic <8P4>

SPECIFICATIONS		Standard body
	Wheelbase	Long Wheelbase
	Roof	Standard roof
	Seating capacity (Doors)	3 (4)
Dimensions & Weight		
Overall	Length	mm 4695
	Width	mm 1695
	Height	mm 1980
Wheelbase		mm 2570
Tread	Front	mm 1470
	Rear	mm 1465
Cargo space	Floor length	mm 2930
	Width	mm 1545
	Height	mm 1335
Overhang	Front	mm 1050
	Rear	mm 1075
Ground clearance		mm 195
Gross vehicle weight*1		kg 2800
Fuel tank capacity	liters	70
Chassis		
Transmission type		5-speed MT
Brakes	Front	Ventilated disc
	Rear	Leading-trailing, drum
Suspension	Front	Double wishbone
	Rear	Leaf spring, rigid
Steering gear type		Rack & pinion
Min. turning radius	Tire	m 5.0
Tires		195R15C
Engine		
Engine type		3.0-liter Diesel (5L-E)
Number of cylinders & arrangement		4 cylinders, in-line
Valve mechanism		OHC
Bore x stroke	mm	99.5 x 96.0
Displacement	c.c.	2986
Compression ratio	to 1	22.2
Fuel system		Electronic Fuel Injection
Max. output (EEC)	kW/rpm	68/4000
Max. torque (EEC)	Nm/rpm	197/2200

*1: Gross vehicle weight may vary depending on differences in specification. Contact your local dealer for details.

- Addition of extra features may change figures in this chart.
- Toyota Motor Corporation reserves the right to alter any details of specifications and equipment without notice. Details of specifications and equipment are also subject to change to suit local conditions and requirements. Please inquire at your local dealer for details of any such changes that might be required for your area. Note: Vehicles pictured and specifications detailed in this catalog may vary from models and equipment available in your area.
- Vehicle body color might differ slightly from the printed photos in this catalog.

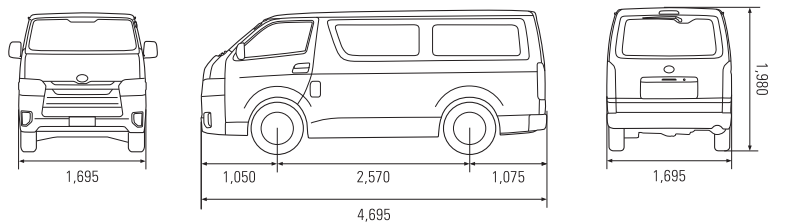

unit : mm

Note: Please inquire at your local dealer for details on the availability of features.



TOYOTA MOTOR ASIA PACIFIC PTE LTD